

GENERAL NOTES CONTINUED


- All work shall be as approved as per NYC Building Code C26-504.6.
- All interior finishes shall comply with NYC Building Code C26-504.10.
- Inspection of fireproofing is subject to control inspection requirements as per NYC Building Code C26-504.7.
- Before commencing work, the contractor shall notify the Engineer of any areas without fireproofing. All exposed structural steel and shipped off fireproofing shall be painted with Galco type D-C-F or as approved equal as directed by the Engineer.
- Thermal barrier mineral fireproofing as manufactured by U.S. Gypsum Co. or an approved equal shall be tightly packed in all voids between the top channel and the ribbed steel decking above and around all penetrations of a fire rated wall, E.G.: trusses, ducts, etc.
- Caroting shall conform to the Port Authority specification for flammability and smoke developed ratings.
- Do not mechanically secure studs to header tracks in partitions construction.
- All salvageable materials shall be returned by the contractor to Tower B, basement level 294, Port Authority.
- Work to be furnished by P.A. installed by contractor, to be installed by P.A. Locksmith.
- Work to be furnished by P.A. and installed by P.A. Locksmith.

FINISH LEGEND


- (P1) BUILDING STANDARD LPIA LIGHT BEIGE
- (P2) BUILDING STANDARD AC 342 MEDIUM BEIGE
- (V1) VINYL VICRTEX "ARND" SOMALI TAN 9600
- (T1) BUILDING STANDARD Y.A.T.
- (C1) CARPET - N.I.C.

NOTES:

- UNLESS OTHERWISE NOTED ALL DOORS TO BE PAINTED SEMI-GLOSS TO MATCH ADJACENT VINYL OR PAINT.
- INSIDE OF CLOSETS TO BE PAINTED P.1.
- PAINT CONVECTOR SEMI-GLOSS P.1.
- PAINT BOTH SIDES OF ENTRANCE DOORS #1, P.2.
- LOCKSET FOR DOOR TO BE RELOCATED, TO BE FURNISHED AND INSTALLED BY P.A. LOCKSMITH.

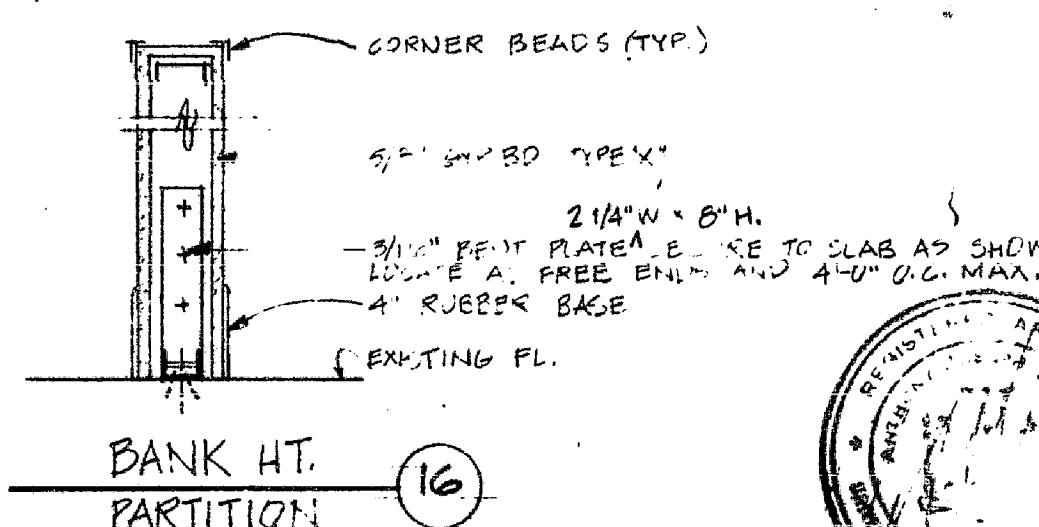

KEY PLAN

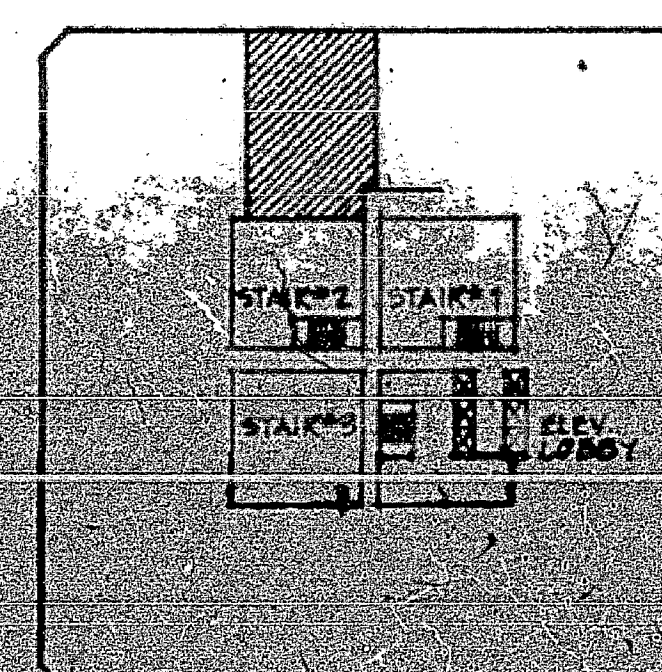

NO SCALE

DOOR HARDWARE
2 LOCKSET CORBIN
2 LATCHSET CORBIN
2 SURFACE MTD CLOSER
DOOR NOTES
1. ALL DOORS TO BE UNDER CUT
2. ALL DOORS TO BE UNDER CUT

PARTITION LEGEND

EXISTING PARTITION TO REMAIN	NEW PARTITION TO BE REMOVED
NEW PARTITION TO BE REMOVED	NEW PARTITION TO BE REMOVED
NEW PARTITION TO BE REMOVED	NEW PARTITION TO BE REMOVED
NEW PARTITION TO BE REMOVED	NEW PARTITION TO BE REMOVED
NEW PARTITION TO BE REMOVED	NEW PARTITION TO BE REMOVED
NEW PARTITION TO BE REMOVED	NEW PARTITION TO BE REMOVED
NEW PARTITION TO BE REMOVED	NEW PARTITION TO BE REMOVED
NEW PARTITION TO BE REMOVED	NEW PARTITION TO BE REMOVED
NEW PARTITION TO BE REMOVED	NEW PARTITION TO BE REMOVED
NEW PARTITION TO BE REMOVED	NEW PARTITION TO BE REMOVED

GENERAL NOTES

- All work to be done in accordance with the rules and regulations of the N.Y.C. building codes and all other governing authorities.
- All dimensions are to clear surfaces unless otherwise noted.
- Contractor must inform architect for approval of chair lines for partitions.
- The general conditions of the A.A.A. contract to govern the procedures and execution of the project.
- All doors unless otherwise shown to be 6' off of intersecting partitions.
- Walls shown aligned with existing building structure shall be flush and smooth with existing surfaces.
- All existing walls affected by new work or by demolition shall be patched and made smooth for receiving of new wall covering or paint.
- Contractor to verify all conditions.
- REVISIONS AND INSTALLATION OF ANY MATERIALS IN EXCESS OF QUANTITIES SHOWN SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.

RELEASED FOR BIDDING
BY *[Signature]* DATE 1-15-80
RELEASED FOR CONSTRUCTION
BY *[Signature]* DATE 2/28/80
MANAGER, RECORDS DIVISION

NO.	DATE	REVISIONS
1	1-15-80	REVISIONS AS PER MEETING 1-10-80 W/ MR. ADURA & MR. CLARK OF P.A.
2	12-10-79	GENERAL REV. AS PER PORT AUTHORITY ENG. COMMENTS DATED 12-5-79.

ZANUSSI CORP. OF AMERICA

ONE WORLD TRADE CENTER

PARTITION PLAN

DI SANTO ASSOCIATES

ARCHITECTS - INTERIOR DESIGN

CONTRACTOR: NEW YORK CITY PLANNING

NEW CENTRAL PARK 30 NYC 1007

DATE: 5-2-79
SCALE: 1/2\"/>